

Diagnostica batteria - Serie BSM

Battery monitoring - Series BSM

BSM 1

- Sistema di diagnostica batteria basato su microprocessore
- Acquisizione e memorizzazione dei seguenti dati:
- Misura della tensione di 11 blocchi ognuno composto da 5 - 6 celle
- Misura della corrente
- 3 misure della temperatura
- Scarica diagnostica periodica programmabile
- Interfaccia RS-232 per acquisizione dati tramite PC
- Interfaccia software per PC inclusa
- 10 relè di allarme
- Esecuzione rack standard 19" 2U



BSM 1

- Microprocessor-based system for battery diagnostic
- Acquisition and non-volatile storage of following data:
- Voltage measures of #11 Blocks each composed of 5 or 6 cells
- Current measure
- #3 Temperature measures
- Programmable periodic diagnostic discharge
- RS-232 interface for PC data acquisition
- PC-side interface software included
- #10 Alarm relays
- Construction in 19" standard rack 2U



Controllo remoto

Remote monitoring

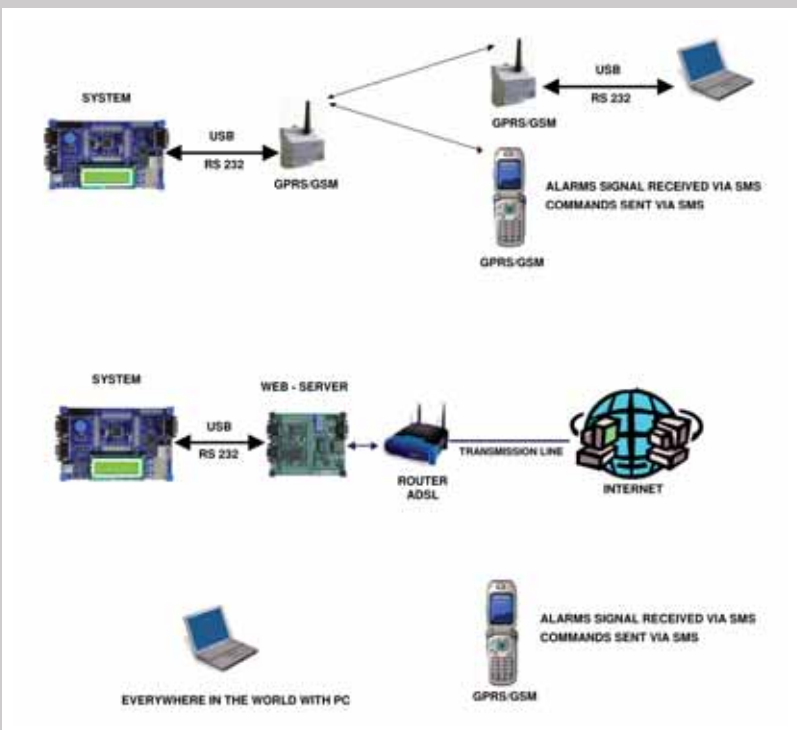

TELETECNICA

TELETECNICA s.r.l.

Loc. Ponte Romano, 6 - 06028 - Sigillo (PG) Italy
 tel. +39 075 9178005 fax +39 075 9178006
 info@teletecnicaweb.it - www.teletecnicaweb.it